



LAWRENCE
LIVERMORE
NATIONAL
LABORATORY

EMPIRICAL OBSERVATIONS OF EARTHQUAKE-EXPLOSION DISCRIMINATION USING P/S RATIOS AND IMPLICATIONS FOR THE SOURCES OF EXPLOSION S-WAVES

W. R. Walter, E. Matzel, M. Pasyanos, D. B.
Harris, R. Gok, S. R. Ford

July 3, 2007

MRR2007 - 29th Research Review on Nuclear Explosion
Monitoring Technologies
Denver, CO, United States
September 25, 2007 through September 27, 2007

Disclaimer

This document was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor the University of California nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or the University of California, and shall not be used for advertising or product endorsement purposes.

EMPIRICAL OBSERVATIONS OF EARTHQUAKE-EXPLOSION DISCRIMINATION USING P/S RATIOS AND IMPLICATIONS FOR THE SOURCES OF EXPLOSION S -WAVES

William R. Walter, Eric Matzel, Michael E. Pasyanos, David B. Harris, Rengin Gok, and Sean R. Ford

Lawrence Livermore National Laboratory

Sponsored by National Nuclear Security Administration
Office of Nonproliferation Research and Development
Office of Defense Nuclear Nonproliferation

Contract No. W-7405-ENG-48

ABSTRACT

We continue exploring methodologies to improve earthquake-explosion discrimination using regional amplitude ratios such as P/S . The earliest simple source models predicted P/S wave amplitudes for explosions should be much larger than for earthquakes across the body wave spectrum. However empirical observations show the separation of explosions from earthquakes using regional P/S amplitudes is strongly frequency dependent, with relatively poor separation at low frequencies (~ 1 Hz) and relatively good separation at high frequencies ($> \sim 3$ Hz). We demonstrate this using closely located pairs of earthquakes and explosions recorded on common, publicly available stations at test sites around the world (e.g. Nevada, Lop Nor, Novaya Zemlya, Semipalatinsk, India, Pakistan, and North Korea). We show this pattern appears to have little dependence on the point source variability revealed by longer period surface wave modeling. For example regional waveform modeling shows strong tectonic release from the May 1998 India test in contrast with very little tectonic release in the recent North Korea test, but the P/S discrimination behavior is similar in both events, using the limited regional data available.

While accepted explosion P -wave models have been available for many years, the frequency behavior of the P/S discriminant has inspired a variety of competing models to explain how explosions generate S -waves. We briefly review some of these models in the context of the P/S discriminant observations. One hypothesis is that S -waves are generated mainly from conversion of P -waves and surface waves, so S -waves from explosions can be predicted from the P -wave models via a frequency dependent transfer function. A different hypothesis is that significant generation of S -waves comes from the CLVD (compensated linear vector dipole) component created by spall above the explosion. A recent model by Fisk (2006) shows the explosion S -wave spectra can be modeled using the P -wave spectra with the corner frequency reduced by the ratio of the wave velocities, which seems to imply a direct generation of S -waves in the source region. We examine a number of nuclear tests from around the world in light of these models. Given the importance of depth on some of the model predictions we reexamine some of the overburied explosions in Nevada. We also look at chemical explosions, including dedicated single shots at different depths and mining shots at adjacent open pit and underground mines to look at depth effects. Finally we examine a subset of Nevada data with signal above noise up to 16 Hz to determine if discrimination performance saturates at frequencies around 6 Hz as some models predict, or continues to improve at higher frequencies.

*This research was performed under the auspices of the U.S. Department of Energy by the University of California Lawrence Livermore National Laboratory under contract number W-7405-ENG-48.

OBJECTIVES

Monitoring the world for potential nuclear explosions requires characterizing seismic events and discriminating between natural and man-made seismic events, such as earthquakes and mining activities, and nuclear weapons testing. We continue developing, testing, and refining size-, distance-, and location-based regional seismic amplitude corrections to facilitate the comparison of all events that are recorded at a particular seismic station. These corrections, calibrated for each station, reduce amplitude measurement scatter and improve discrimination performance. We test the methods on well-known (ground truth) datasets in the U.S. and then apply them to the uncalibrated stations in Eurasia, Africa, and other regions of interest to improve underground nuclear test monitoring capability.

RESEARCH ACCOMPLISHED

As part of the overall National Nuclear Security Administration Ground-based Nuclear Explosion Monitoring (GNEM) Research and Engineering program, we continue to pursue a comprehensive research effort to improve our capabilities to seismically characterize and discriminate underground nuclear tests from other natural and man-made sources of seismicity. To reduce the monitoring magnitude threshold, we make use of regional body and surface wave data to calibrate each seismic station. Our goals are to reduce the variance and improve the separation between earthquakes and explosion populations by accounting for the effects of propagation and differential source size, and by optimizing the types and combinations of amplitude measurements used.

Regional Phase Amplitude P/S Observations

In the early days of underground nuclear testing the expectation as shown in Figure 1, was that explosions would generate little S-wave energy and relative P/S wave amplitudes could be used as one technique to distinguish them from earthquakes. Prior to the advent of widespread digital seismometry in the 1990's observations of regional P/S amplitudes tended to be dominated by frequencies around 1 Hz. As shown in Figure 2 at a number of major nuclear test sites, these observations did not show clear separation between event types. Here we focus on closely spaced pairs of events to minimize any path effects.

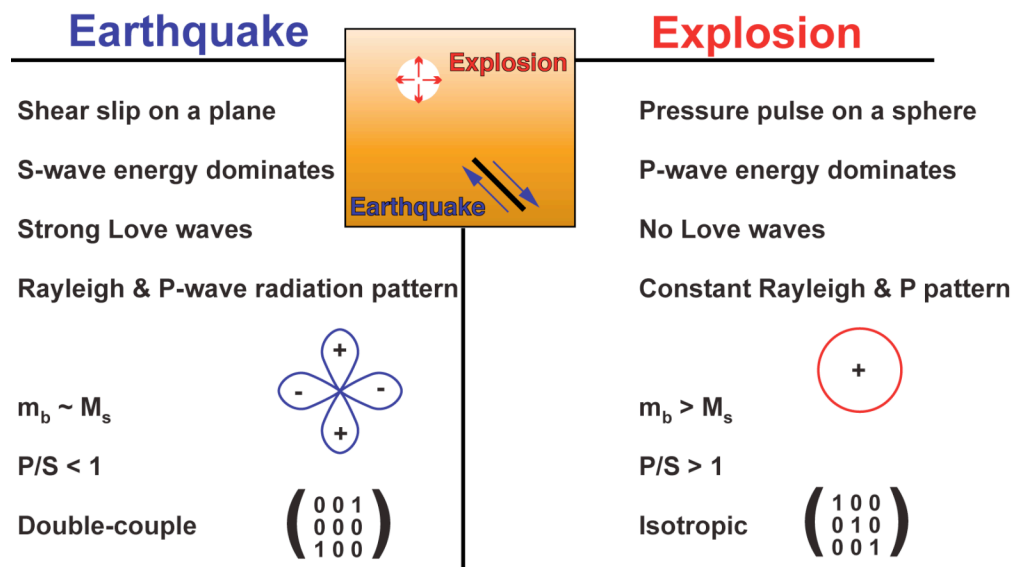


Figure 1. An overview of the theoretical differences between a pure explosion and a pure earthquake leading to expected observational differences. Actual underground nuclear explosions are often more complex.

Low-frequency P/S does not discriminate closely located events recorded on the same station at nuclear test sites

1-2 Hz Earthquake and Explosion pairs

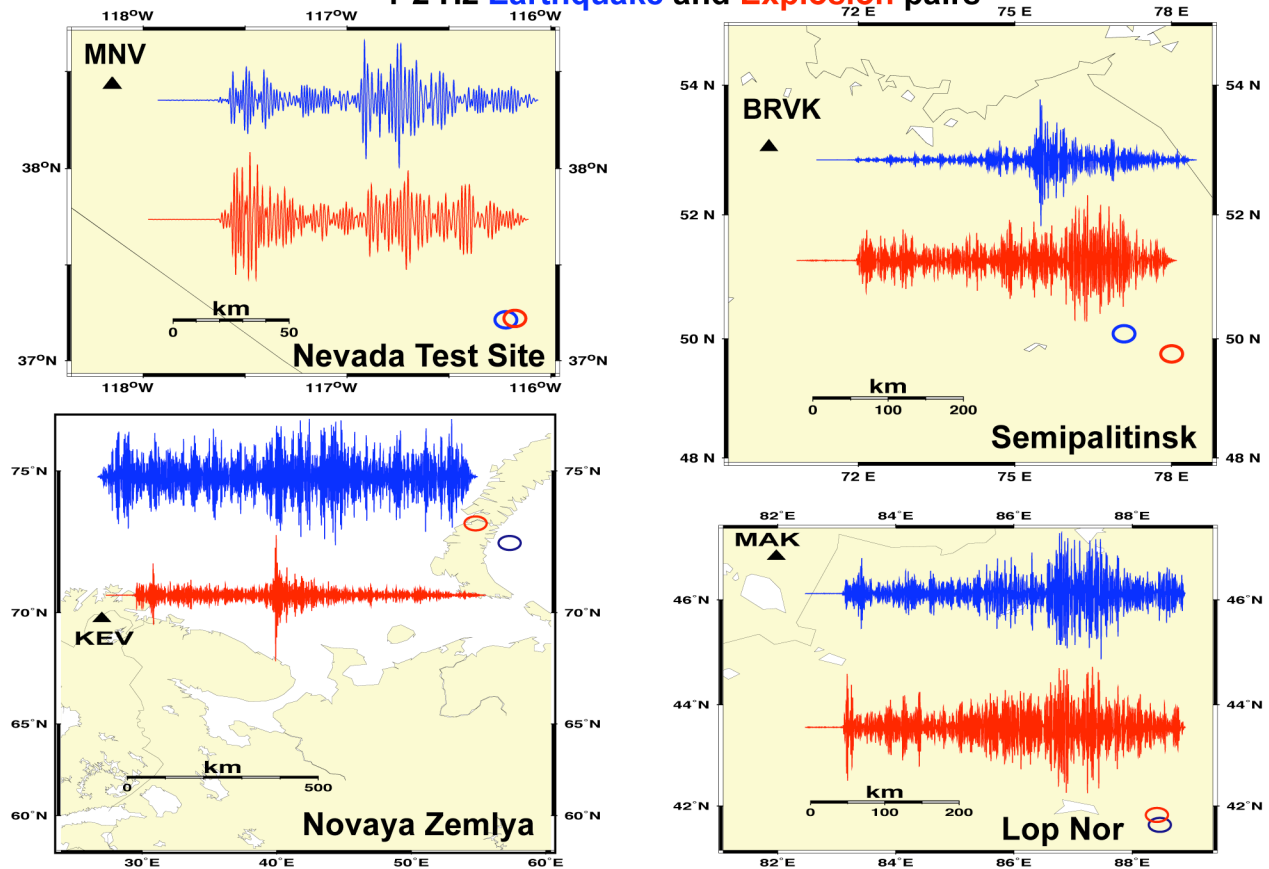


Figure 2. Bandpass filtered 1-2 Hz seismograms of earthquakes (red) and explosions (blue) pairs at nuclear test sites show little consistent relative P to S wave amplitude differences between the two source types.

With the advent of digital seismometry in the late 1980's and early 1990's a large number of different researchers found that at high frequencies, greater than around 2-4 Hz, the regional P/S amplitude ratios did discriminate explosions from earthquakes (e.g. Dysart and Pulli, 1987; Baumgardt and Young, 1990; Kim et al 1993; Walter et al., 1995; Taylor, 1996; Hartse et al 1997; Battone et al 2002). For example in Figure 3 we show the same events in Figure 2 but filtered at a higher frequency, 6-8 Hz. In this case the explosions clearly show larger P/S amplitude ratios than the earthquakes for all cases.

Examination of P/S ratios at high frequencies has now been done all over the world. As we show in Figure 4. The characteristic pattern of explosions have larger relative P-wave amplitudes than S- wave amplitudes appears to hold everywhere provided that we filter the data at a high enough frequency and that we compare events with very similar paths. This is true event for the recent announced nuclear test by North Korea on October 9, 2006 as shown in Figure 3. In this case the nearest earthquakes for comparison are around 100 km away, but we can bracket the test with earthquakes and clearly see that it is deficient in high frequency S-wave energy.

High-frequency P/S appears to discriminate closely located similarly sized events recorded on the same station globally

6-8 Hz Earthquake and Explosion pairs

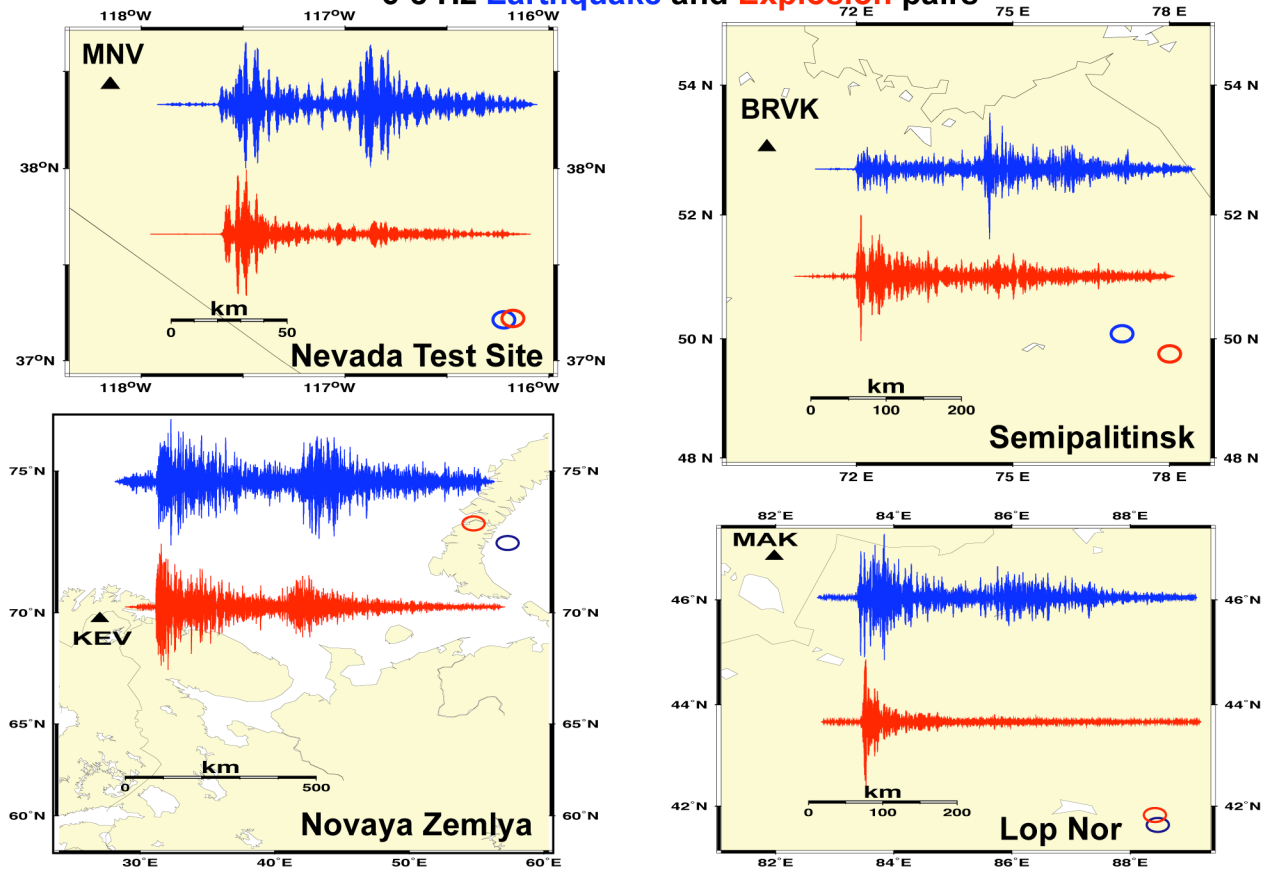


Figure 3. 6-8 Hz bandpass seismograms of the same events in figure 1 show significant and consistent relative P to S wave amplitude differences between the two source types.

This North Korean test example shows the importance of accounting for path, as the S-wave energy in this case is portioned into both Sn and Lg phases. The seismic energy path crosses the Sea of Japan a region of oceanic crust where Lg does not efficiently propagate. One can see that the earthquake with a greater proportion of its path in the Sea of Japan has stronger Sn than the other. In such cases it is important to consider P/S ratios for all the observable regional phases.

When similar-sized earthquakes and explosions are nearly co-located, we can understand the observed seismic contrasts, such as the relative P-to-S wave excitation, in terms of depth, material property, focal mechanism and source time function differences. However, it is well known that path propagation effects (e.g. attenuation, blockage) and source scaling effects (e.g. corner frequency scaling with magnitude) can make earthquakes look like explosions and vice versa. We developed a technique called MDAC (Magnitude and Distance Amplitude Corrections, Walter and Taylor, 2002) that can account for these effects with proper calibration. We use the earthquakes alone to determine the MDAC parameters such as geometrical spreading, frequency dependent Q and the average apparent stress. After calibration the MDAC formulation provides expected spectral amplitudes as a function of phase, magnitude and distance. These can then be subtracted from the actual observations. For earthquakes the corrected data should exhibit a close zero mean, and a magnitude and distance detrended population. Explosions should have significant non-zero mean residuals, leading to improved discrimination.

High-frequency P/S appears to work everywhere

6-8 Hz Earthquake and Explosion pairs

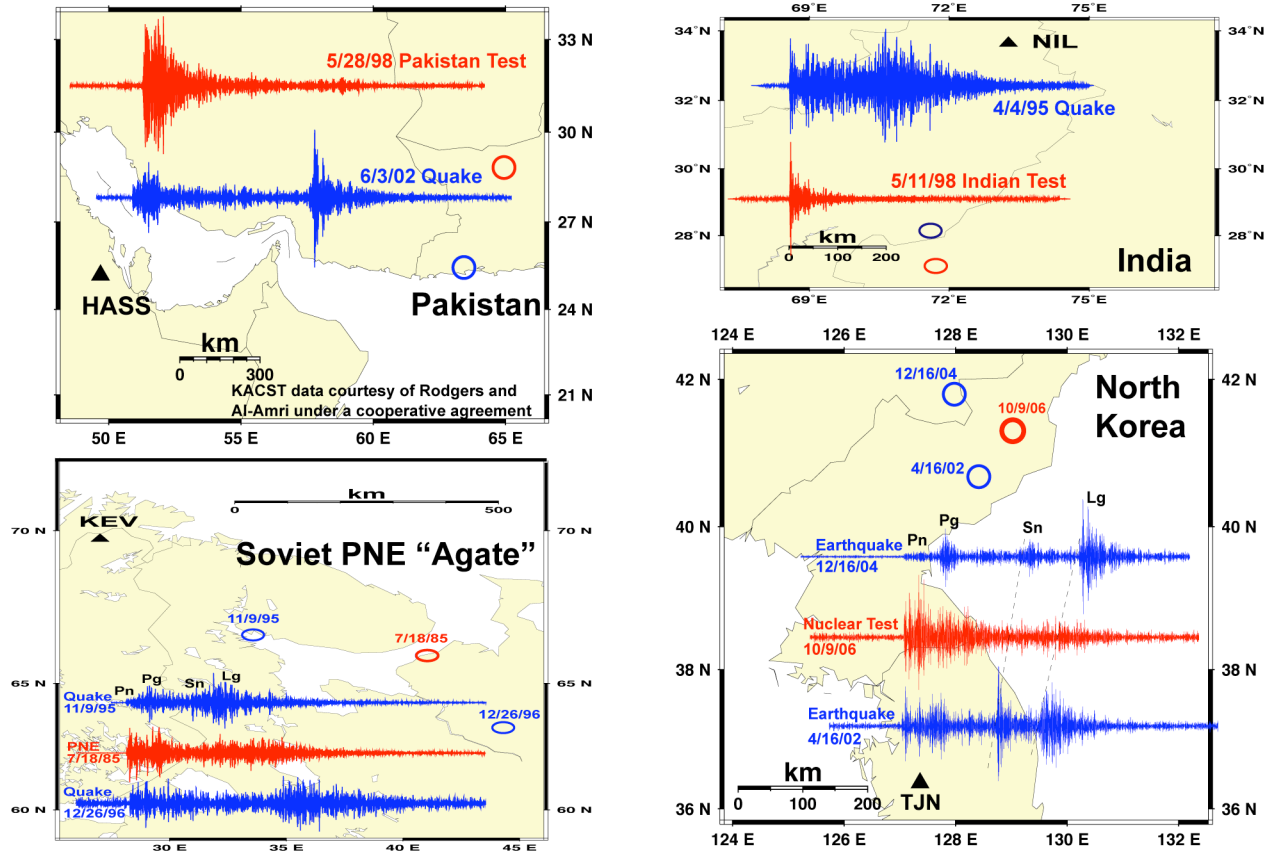


Figure 4. Examination of high frequency filtered seismograms of closely spaced groups of earthquakes and underground nuclear explosions at many different locations around the world show a characteristic difference: explosion have relatively larger P/S amplitude values.

As shown in figure 5, we applied MDAC to correct for path effects for earthquakes recorded all around the Korean Peninsula, Yellow Sea and Northeastern China region recorded at stations MDJ and TJN, which are publicly available through data centers such as IRIS. While the North Korean test is easily discriminated at both stations at high frequencies such 6-8 Hz the two stations show slightly different frequency behavior, with MDJ discriminating well at all frequencies above 2 Hz, while TJN appears to keep improving as frequency increases all the way to 8 Hz. We are analyzing the frequency dependence of the P/S ratios for a variety of regions in order to better quantify the effect.

A remarkable feature of the high frequency P/S ratios for discriminating underground nuclear tests is they seem to work even in cases where the long period signal indicate that the explosions are complex. A case in point is the May 11 1998 Indian test shown in Figure 4. That test shows significant Love waves and reversed Rayleigh waves (Walter et al, unpublished data, Selby et al., unpublished data) indicating a large amount of tectonic release and significant non-isotropic components of the moment tensor source. Despite the complexities in the source the S-waves disappear at frequencies of 1 Hz and higher and the test easily discriminates from nearby earthquakes as shown in Figure 4 and by Rogers and Walter (2002). In fact it looks very similar to the North Korean case which as we shown in the next section has almost no tectonic release. These two characteristics:

- 1) S-waves from explosions are strong at lower frequencies and diminish at frequencies greater than about 2-4 Hz,
- 2) S –waves from explosions at higher frequencies are independent of tectonic release and long period character, are important constraints on any model that tries to explain how nuclear test generate S-waves

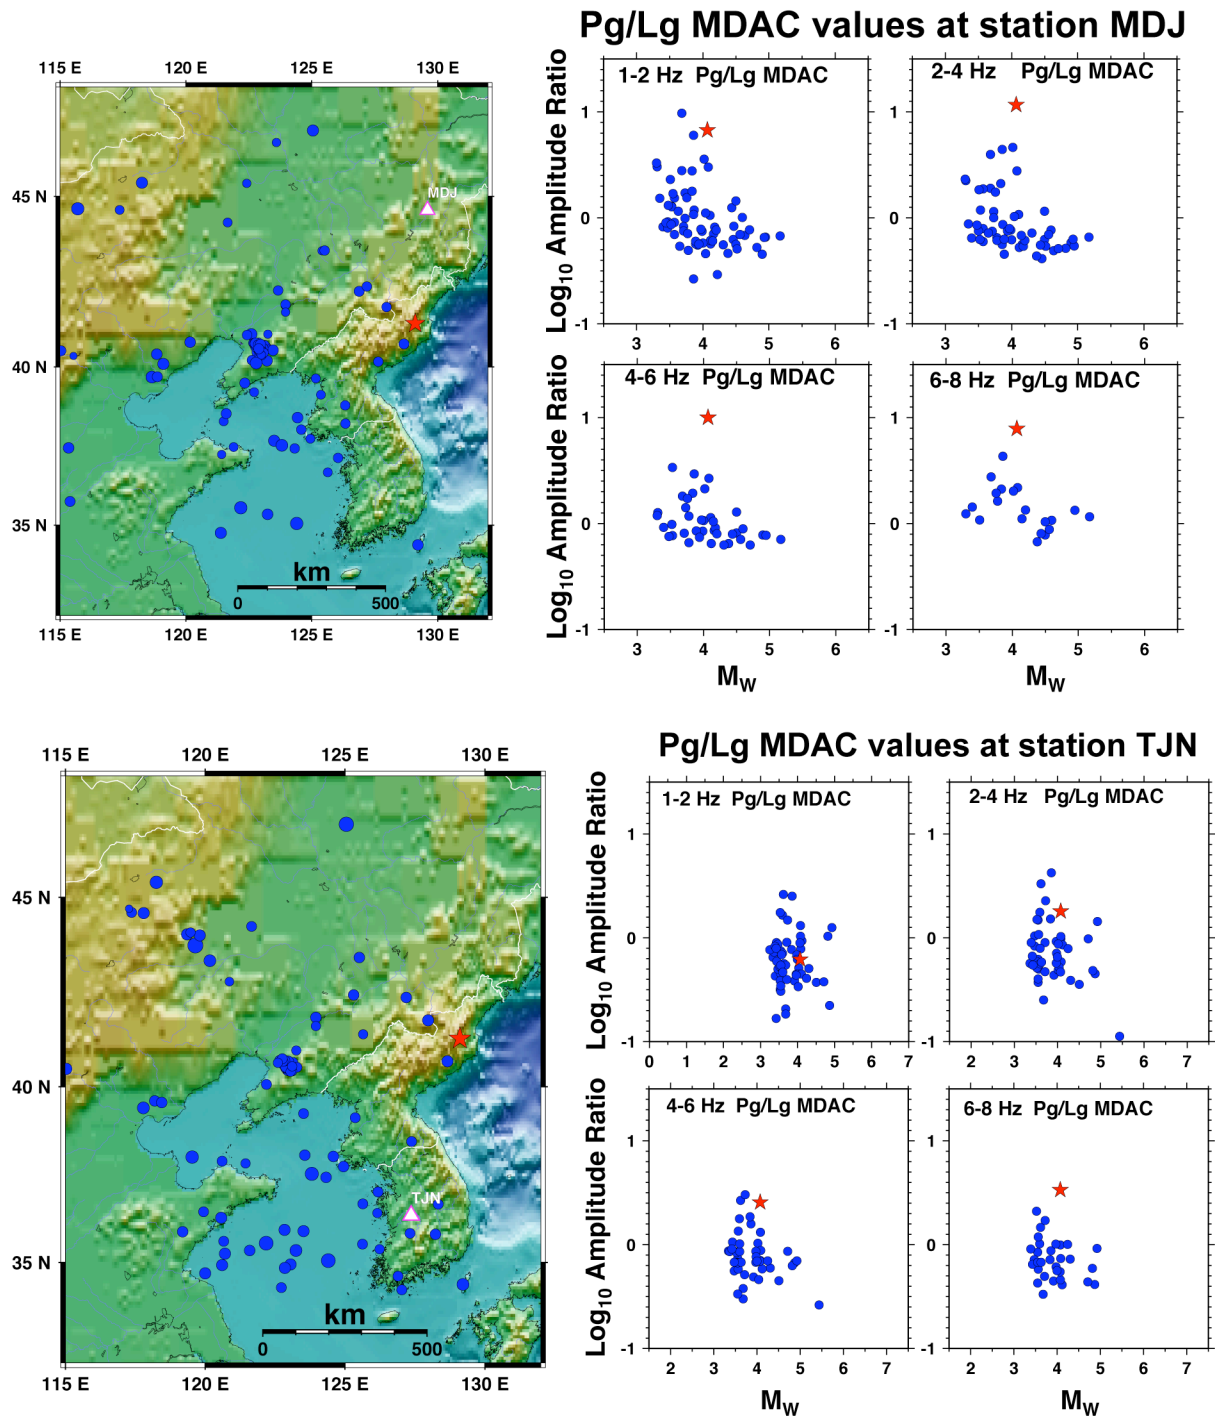


Figure 5. The maps show the earthquakes (blue circles) and the October 9, 2006 North Korean nuclear test (red star) observed at seismic stations MDJ and TJN. The scatter plots show the MDAC path corrected P/S ratios in four different frequency bands. For station MDJ discrimination improves as you move from 1-2 to 2-4 Hz but seems more or less constant at higher frequencies. In contrast for TJN the P/S discriminant seems to continue to improve as frequency increases up to 6-8 Hz.

In Figure 6 we show long period waveform fits of the North Korean nuclear test compared with a nearby earthquake. This test show little tectonic release and appears reasonably well fit at long period by a purely isotropic moment tensor.

The long-period waveforms are fit by a simple explosion without Love waves indicating minimal tectonic release

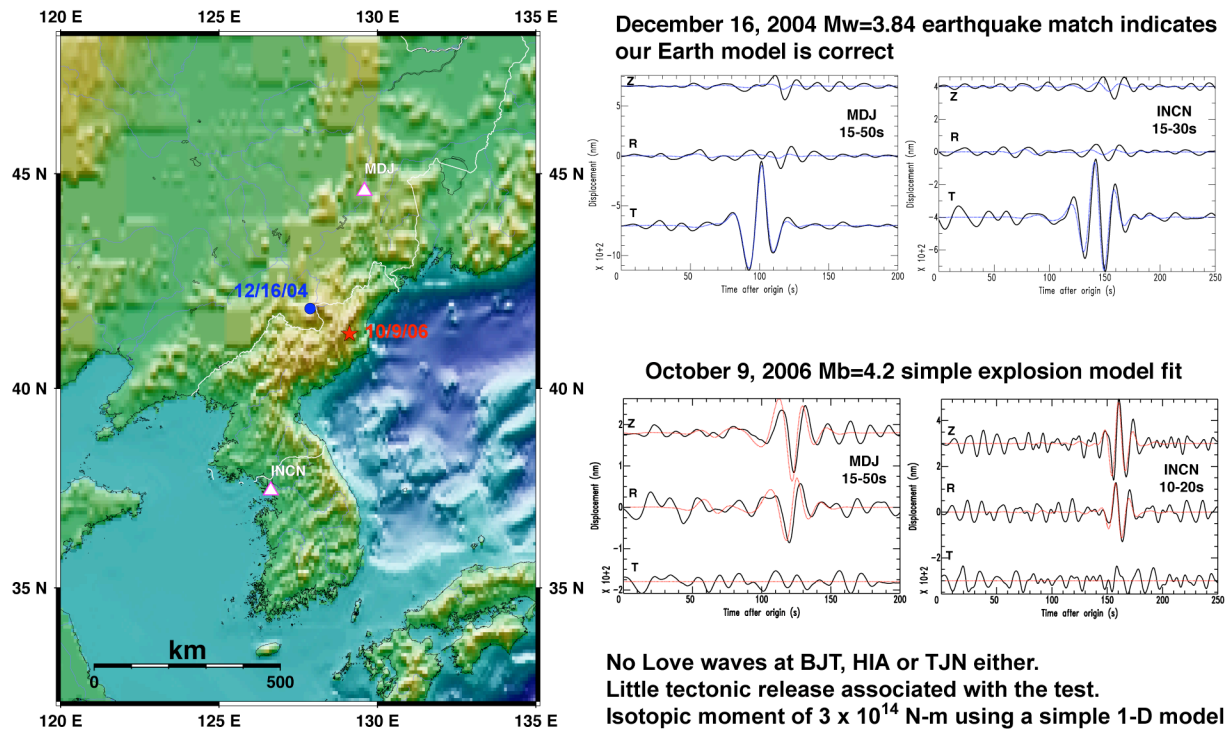


Figure 6. Long-period waveform modeling for the point source moment tensor parameters of the October 9 2006 North Korean nuclear test and a nearby earthquake on December 16, 2004. Top plots shows good waveform fits mainly to Love waves for the earthquake, which indicates we have a good earth model for synthetic seismogram generation. The bottom plot show that a pure isotropic explosion source provides a very good fit for the mainly Rayleigh waves observed for the nuclear test.

Explosion S-waves Models

While there are long-standing explosion P-wave models that have been used for many years, there is still no widely accepted model to predict S-waves from nuclear tests. Here we show two different ideas about how S-wave are generated from nuclear explosions and in each case we are able to match some S-wave observations from the North Korean declared nuclear test of October 9, 2006.

We show in Figure 6 some very quick and dirty comparisons of parametric models with source spectra inferred from path corrected observations at station TJN. On the left we compare the Mueller-Murphy (1971) granite P-wave model with inferred P source observations. Note that we can have a variety of models with the same spectral level at low frequencies ($< 2\text{Hz}$) depending upon depth and source size. As of this writing the North Koreans have not announced any information on yield and emplacement conditions. For this particular station subject to the assumptions (e.g. path correction is right, radiation is isotropic, Mueller-Murphy granite model is applicable, etc.) we are able to match the P waves reasonably well using the 100m depth model, however the long period level is a bit high compared to the waveform modeling moment.

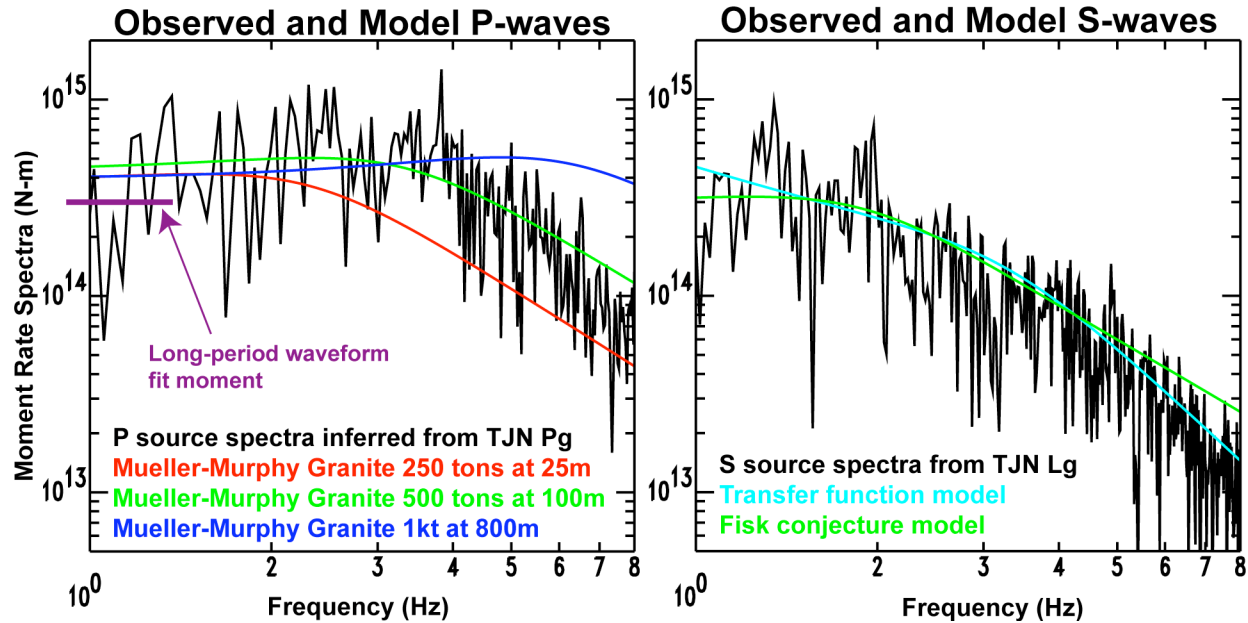


Figure 7. We infer P- and S-wave source spectra from observed station TJN Pg and Lg spectra after correcting for path effects. On the left we compare the P-wave spectra with Mueller-Murphy granite models for yields from 250 to 1000 tons and depths from 25 m to 800m. On the right we compare two models for S-waves with data. See text for discussion.

The S-wave case is shown on the right hand side of Figure 7. We follow the Walter et al. (1994) idea that the S waves come mainly from conversion and can be matched by modifying the P-spectra, using a P to S transfer function. Here we simply assume a transfer function of similar form to that shown in Figure 6 of Walter et al. (1994) is applicable, that is strong conversion near 1 Hz and weaker conversion at higher frequencies. We used a simple line in log-amplitude versus log-frequency space, which decays about a factor of ten from in amplitude from 1 Hz to 10 Hz. Multiplying by the assumed P-wave source model, in this case the Mueller-Murphy granite function for 500 tons at 100 meters depth, we get the light blue line shown in Figure 7. The result is a pretty good match to the observed data. This simply illustrates it is possible to predict explosion S-waves using simple parametric P-wave models and transfer functions, but it is not the only way to do so.

For comparison we can also apply the Fisk (2006) conjecture that the S-waves are matched by lowering the Mueller-Murphy corner frequency by the ratio of the P to S wave velocity. The implication of this model is that S-waves are generated close to the source and are tied to the elastic radius similarly to P-waves. The Fisk (2006) conjecture does not specify the absolute level so here we scaled it to match the data as shown in green in Figure 7. This is also a reasonably good match to the observed data. Within this frequency band and allowing arbitrary absolute scaling, both models are similar. However at higher and lower frequencies (or much larger or smaller, or much deeper explosions) there are significant differences between these two models. In particular the Fisk (2006) conjecture would say that P/S discrimination at these same frequencies (e.g. 4-8 Hz) would not work well for much smaller (or much deeper) explosions. Fisk (2006) states the frequency band must be above the S-wave corner for discrimination to be effective.

Future Work

To better address difference in predictions between the various models of S-wave generation we need to study events with very different source size, depth and emplacement conditions. For nuclear tests the few very overburied events offer a chance to examine effects that might be related to corner frequency effects. Similarly chemical explosions, to the extent they are similar to nuclear explosion offer a much wider range of source conditions. We are using both of these types of data to test and develop better understanding and better models for predicting nuclear explosion S-waves.

To better address practical explosion identification we are improving our MDAC source and path corrections and looking at optimal combinations of normalized regional amplitude measurements. For example given that there is often discrimination power in all of the frequency bands where P/S is observed, we are testing and quantifying the improvement provided by using multi-band P/S ratios to discriminate explosion from earthquakes.

CONCLUSIONS AND RECOMMENDATIONS

Regional discrimination algorithms require calibration at each seismic station to be used for nuclear explosion monitoring. We apply a Magnitude and Distance Amplitude Correction procedure to remove source size and path effects from regional body-wave phases. This allows the comparison of any new regional events recorded at a calibrated station with all available reference data and models. This also facilitates the combination of individual measures at multiple stations to form multivariate discriminants that can significantly improve performance over single station individual measures. We are working to quantify the performance of P/S ratio discriminants as a function of frequency and number of stations. We are using the AZSPE data to explore the use of industrial chemical explosions to help calibrate regional discriminants in areas where nuclear explosion data is not available.

ACKNOWLEDGEMENTS

We thank Stan Ruppert, and Terri Hauk for loading and maintaining the LLNL database. We thank Doug Dodge and Mike Ganzberger for developing and maintaining RBAP, which was used to make the regional measurements. This work was performed under the auspices of the U.S. Department of Energy by the University of California, Lawrence Livermore under contracts No. W-7405-Eng-48. This is LLNL contribution UCRL-CONF-????.

REFERENCES

- Battone, S., M. D. Fisk and G. D. McCarter (2002), Regional Seismic-Event Characterization Using a Bayesian Formulation of Simple Kriging, *Bull. Seism. Soc. Am.*, 92, p. 2277-2296.
- Baumgardt, D. R. and G. B. Young (1990). Regional seismic waveform discriminants and case-based identification using regional arrays, *Bull. Seism. Soc. Am.*, 80, 1874-1892.
- Dysart, P. S. and J. J. Pulli (1987). Spectral study of regional earthquakes and chemical explosions recorded at the NORES array. SAIC technical report C87-03.
- Fisk, M.D (2006), "Source spectral modeling of regional P/S discriminants at nuclear test sites in China and the Former Soviet Union, *Bull. Seism. Soc. Am.*, 96, 2348-2367.
- Hartse, H., S. R. Taylor, W. S. Phillips, and G. E. Randall (1997). A preliminary study of regional seismic discrimination in Central Asia with an emphasis on Western China, *Bull. Seism. Soc. Am.* 87, 551-568.
- Kim, W. -Y., D. W. Simpson, and P. G. Richards (1993). Discrimination of earthquakes and explosions in the eastern United States using regional high frequency data, *Geophys. Res. Lett.*, 20, 1507-1510.
- Kim, W. -Y., V. Aharonian, A. L. Lerner-Lam, and P. G. Richards (1997). Discrimination of earthquakes and explosions in Southern Russia using regional high frequency three-component data from the IRIS/JSP Caucasus network, *Bull. Seism. Soc. Am.*, 87, 569-588.
- Mayeda, K., Malagnini, L. W. S. Phillips, W. R. Walter and D. Dreger (2005). 2-D or not 2-D, that is the question: A northern California test, *Geophys. Res. Lett.* 32, doi:10.1029/2005GL022882.
- R.A. Mueller and J. R. Murphy (1971), "Seismic characteristics of underground nuclear detonations. Part I. Seismic scaling law of underground detonations," *Bull. Seismol. Soc. Am.*, 61, 1675-1692.

- Rodgers, A. J. and W. R. Walter, (2002). Seismic Discrimination of the May 11, 1998 Indian Nuclear Test with Short-Period Regional Data From Station NIL (Nilore, Pakistan), *Pure Appl. Geophys.* 159, 679-700.
- Springer, D. L., G. A. Pawlowski, J. L. Ricca, R. F. Rohrer and D. K. Smith, (2002). Seismic source summary for all U.S. below-surface nuclear explosions, *Bull. Seism. Soc. Am.* 92, 1806-
- Taylor, S., (1996). Analysis of high-frequency Pg/Lg ratios from NTS explosions and Western U.S. earthquakes, *Bull. Seism. Soc. Am.*, 86, 1042-1053.
- Taylor, S., A. Velasco, H. Hartse, W. S. Philips, W. R. Walter, and A. Rodgers, (2002). Amplitude corrections for regional discrimination, *Pure. App. Geophys.* 159, 623-650.
- W.R. Walter, K. Mayeda and H. J. Patton (1994), "Regional seismic observations of the Non-Proliferation Experiment at the Livermore NTS network," in *Proceedings of the Symposium on The Non-Proliferation Experiment (NPE): Results and Implications for Test Ban Treaties*, M. Denny and S. Stull Eds., 6.193-6.201.
- Walter, W. R., K. Mayeda, and H. J. Patton, (1995). Phase and spectral ratio discrimination between NTS earthquakes and explosions Part 1: Empirical observations, *Bull. Seism. Soc. Am.*, 85., 1050-1067.
- Walter, W. R. and S. R. Taylor (2002), A revised Magnitude and Distance Amplitude Correction (MDAC2) procedure for regional seismic discriminants, Lawrence Livermore National Laboratory UCRL-ID-146882.
- Walter, W. R., K. D. Smith, J. L. O'Boyle, T. F. Hauk, F. Ryall, S. D. Ruppert, S. C. Myers, M. Anderson, and D. A. Dodge (2003). Improving the fundamental understanding of regional seismic signals with a unique western United States dataset, in "Proceedings of the 25th annual Seismic Research Review".